


Produktdatenblatt Technical Datasheet

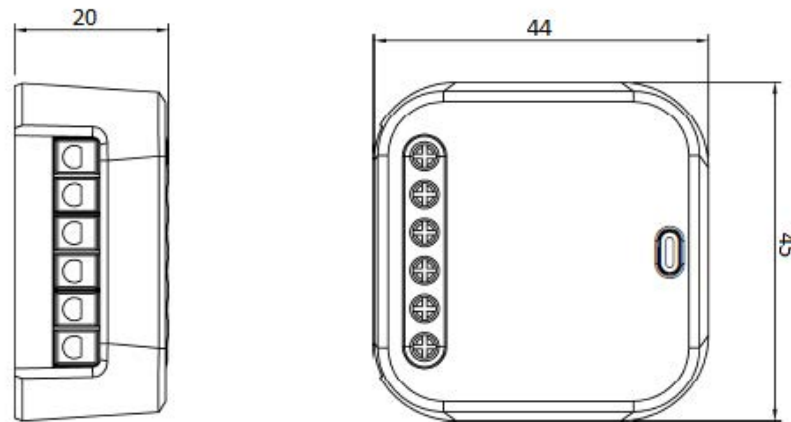

Smart Relais SR600

Das SALUS Smart Relais wird direkt in eine Unterputzdose gesetzt, oder mittels einer Halterung Aufputz montiert. Er ermöglicht es strombetriebene Geräte mit Ihrem Smartphone oder PC mittels der SALUS Smart Home App zu steuern. Das SALUS Smart Relais muss mit dem UGE600 Universellem Gateway verwendet werden.

Technische Informationen :

Produktname	Smart Relais
Abmessungen	44/45/20 in mm (L/B/H)
Eingangsspannung	230 V AC, +/-10% , 50Hz
Schaltleistung	16A

Frequenz	ZigBee 2,4GHz HA1.2
Schutzklasse	IP30

Spezielle Eigenschaften:

S1/S2 Kontakte	Ohne Funktion
Einstellbar über Smarthome APP	Lokale Schaltung (keine APP Steuerung) Ausgang für Lichtschaltung (Taster) Für Schalterfunktion parallel zur APP

Smart Relay SR600

The SALUS smart relay is inserted directly into a wall box or the bracket for wall mounting (sold separately SR5600). It gives you Smart phone control of the device connected to the smart relay via the SALUS connected smart phone app. The SALUS smart relay must be used in conjunction with the SALUS UG600 universal gateway.

Technical information :

Product name	Smart Relay
Dimensions	44/45/20 in mm (L/W/H)
Input Voltage	230 V AC, +/-10% , 50Hz
Switching capacity	16A

Frequency	ZigBee 2,4GHz HA 1.2
IP Rating	IP30


Special Features:

S1/S2 Contacts	No Function
Selectable on Smarthome APP	Switch on and off output (no APP control) Reverse output: suitable for lighting Standalone Control S1/S2 (via manuell Switch, COM/NO via APP)

Anschlüsse /Terminals

COM	Potentialfreier Eingang
NO	Potentialfreier Ausgang
L	Phase 230V AC
N	Null
S1/S2	Schaltklemmen

COM	Common terminal
NO	Switch terminal
L	Power supply 230V AC
N	Power supply 230V AC
S1/S2	Switch input terminals



Date/Version

05/16 – 1.0

Technical disclaimer

Alle Rechte vorbehalten. Technische Änderungen vorbehalten.
We reserve the right to alter our products without notice.
This also applies to products already on order provided
that such changes do not change the functionary
of the product

Salus Controls GmbH