


SPECIFICATION

Nominal Voltage	12V (6 cells in series)	
Rated Capacity	7.2Ah	(C ₂₀ , 1.75V/cell)
Dimensions(mm)	Length	151±2 mm
	Width	65±1.5 mm
	Height	94±1.5 mm
	Total Height	100±2 mm
Nominal Capacity @25°C (Ah)	20 Hour rate (0.364A to 10.5 volts)	7.28Ah
	10 Hour rate (0.695A to 10.5 volts)	6.95Ah
	5 Hour rate (1.242A to 10.5 volts)	6.21Ah
	1 Hour rate (4.680A to 9.6 volts)	4.68Ah
	15 min rate (13.86A to 9.6 volts)	3.46Ah
Approx. Weight	2.05 kg	
Terminal	T1/T2	
Max.Discharge Current	108A @25°C (5s)	
Internal Resistance	25mΩ @25°C (Full Charged Battery)	
Floating Design Life	5 years @25°C	
Ambient Temperature	Charge : -15°C~50°C	
	Discharge : -20°C~60°C	
	Storage : -20°C~50°C	
Container Material	A.B.S, UL94-HB, UL94-V0, Optional	

Self Discharge VRLA batteries can be stored for more than 6 months at 25°C. Self-Discharge ratio less than 3% per month at 25°C. Please charge batteries before using.

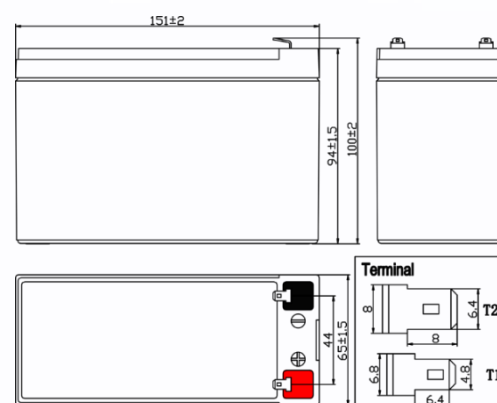

COMPANY CERTIFICATION




CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A), (25°C)

F.V/Time	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	28.40	18.61	13.86	7.380	4.680	2.637	1.883	1.270	0.841	0.720	0.385
1.70V/cell	25.78	17.24	13.07	7.164	4.576	2.596	1.836	1.251	0.828	0.702	0.372
1.75V/cell	23.15	16.16	12.35	6.948	4.518	2.574	1.818	1.242	0.821	0.695	0.364
1.80V/cell	20.77	15.12	11.63	6.732	4.453	2.552	1.796	1.228	0.810	0.684	0.349


CONSTANT WATTAGE DISCHARGE CHARACTERISTICS (WATT), (25°C)

F.V/Time	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	51.36	33.97	25.53	14.08	9.282	5.229	3.753	2.534	1.678	1.438	0.770
1.70V/cell	47.47	32.05	24.50	13.79	9.113	5.170	3.666	2.499	1.653	1.404	0.744
1.75V/cell	43.21	30.58	23.36	13.49	9.006	5.131	3.633	2.482	1.640	1.391	0.730
1.80V/cell	39.12	28.85	22.19	13.18	8.884	5.092	3.593	2.455	1.620	1.369	0.701


Charge Characteristics Curve

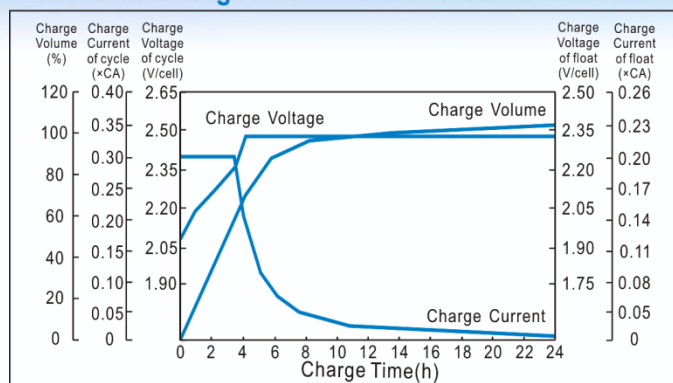


Discharge Characteristics Curve

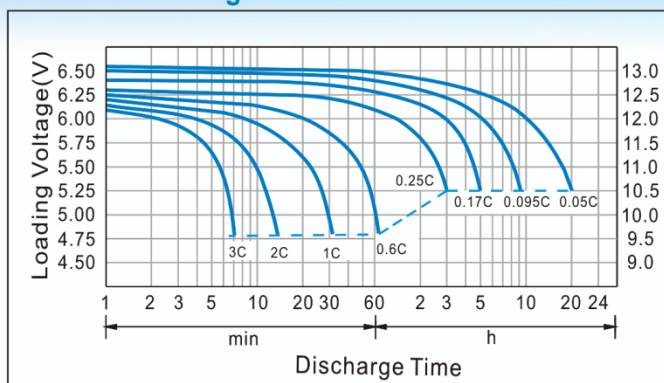

Cycle service life in relation to depth of discharge

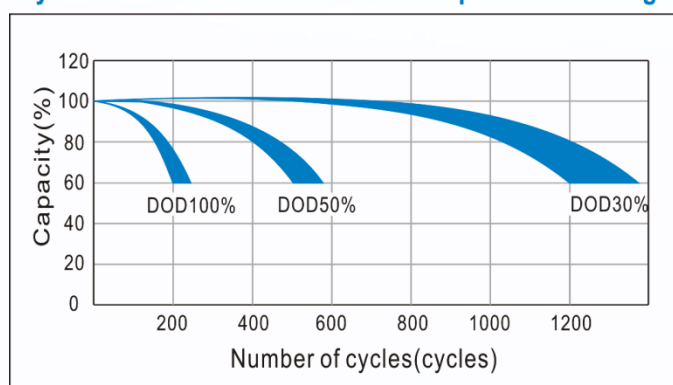

Capacity Storage Characteristics

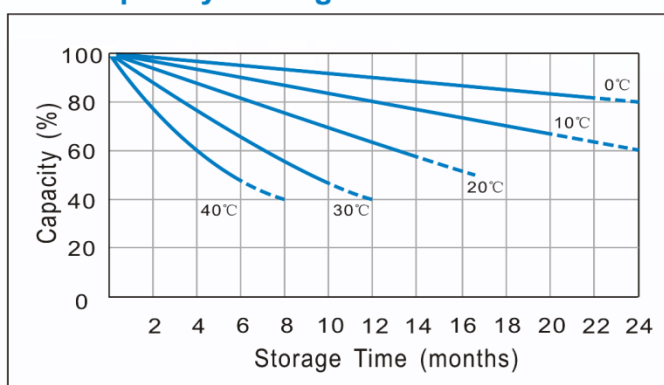

CAPACITY FACTORS WITH DIFFERENT TEMPERATURE

Battery type		-20℃	-10℃	0℃	5℃	10℃	20℃	25℃	30℃	40℃	45℃
GEL Battery	6V & 12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V & 12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

MAINTENANCE & CAUTIONS

☑ Charging Procedure:

Application	Charging method	Charge voltage at 25℃	Temperature compensation coefficient of charging voltage	Max.charging current	Temperature
For standby power source	Constant voltage charging (With current restriction)	2.25~2.30 V/cell	-3mV/℃/cell	0.2CA	-15~50℃
For cycle service		2.45~2.50 V/cell	-4mV/℃/cell	0.3CA	

☑ Every month, recommend inspection every battery voltage.

☑ Every three months, recommend equalization charge for one time. [Equalization charge method:](#)

Step 1: Discharge: 100% rate capacity discharge.

Step 2: Charge: Max. Current 0.3CA, constant voltage 2.45-2.50V/Cell charge 24h.

☑ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, Ambient temperature and charging voltage.

☑ Charge the batteries at least once every six months, if they are stored at 25℃. [Charging Method:](#)

Constant Voltage: $-0.2C \times 2h + 2.45 - 2.50V/cell \times 24h$, Max. Current 0.25CA

Constant Current: $-0.2C \times 2h + 0.1C \times 12h$

Fast: $-0.2C \times 2h + 0.3C \times 4h$

☑ Terminal of torque:

Bolt	M5	M6	M8
Terminal	T3、T10	T4、T7、T11、T12、T13	T5、T6、T8、T9、T14
Torque	6~7N.m	8~10N.m	10~12N.m

Note: The manufacturer reserves the right to change and modify the design and specifications without prior notice

SHENZHEN POWER KINGDOM CO., LTD.

Baigongao Industrial Zone, Xikeng New Village, Fumin, Guanlan Town, Shenzhen Guangdong, China

Website: www.powerkingdom.com.cn Email: sales@powerkingdom.com.cn Tel: +86 755 22161920 / 22161923

Edition Jan 2023