

## PRODUCT DATASHEET

### P R63 40 36 ° 2.6 W/2700 K E27

PARATHOM® R63 | LED reflector lamps R63 with retrofit screw base



#### Areas of application

- Shops and exhibition rooms
- Domestic applications
- Commercial applications
- Accent lighting
- Outdoor use in suitable outdoor luminaires only

#### Product benefits

- Quick, simple and safe replacement without rewiring
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp
- Low maintenance costs thanks to long lifetime
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time

#### Product features

- LED alternative to high voltage halogen lamps
- Not dimmable
- Base: E27
- Lamp made of glass
- Good quality of light; color rendering index  $R_a \geq 80$
- Lifetime: up to 15,000 h



## TECHNICAL DATA

### Electrical data

|  |             |
|--|-------------|
| Nominal wattage                          | 2.6 W       |
| Construction wattage                     | 2.60 W      |
| Nominal voltage                          | 220...240 V |
| Claimed equiv. conventional lamp power   | 40 W        |
| Nominal current                          | 20 mA       |
| Type of current                          | AC          |
| Inrush current                           | 9.6 A       |
| Operating frequency                      | 50/60 Hz    |
| Mains frequency                          | 50/60 Hz    |
| Max. lamp no. on circuit break. 10 A (B) | 213         |
| Max. lamp no. on circuit break. 16 A (B) | 341         |
| Power factor $\lambda$                   | 0.40        |

### Photometrical data


|   |               |
|---|---------------|
| Luminous intensity                      | 398 cd        |
| Luminous flux                           | 210 lm        |
| Nominal useful luminous flux 90°        | 210 lm        |
| Luminous efficacy                       | 80 lm/W       |
| Lumen main.fact.at end of nom.life time | 0.70          |
| Light color (designation)               | Warm White    |
| Color temperature                       | 2700 K        |
| Color rendering index Ra                | $\geq 80$     |
| Light color                             | 827           |
| Standard deviation of color matching    | $\leq 6$ sdcn |
| Rated peak intensity                    | 398 cd        |
| Rated LLMF at 6,000 h                   | 0.80          |
| Flickering metric (Pst LM)              | 0.1           |
| Stroboscope effect metric (SVM)         | 0.1           |



### Light technical data

|                                    |          |
|------------------------------------|----------|
| Beam angle                         | 36 °     |
| Warm-up time (60 %)                | < 0.50 s |
| Starting time                      | < 0.5 s  |
| Rated beam angle (half peak value) | 36.00 °  |

### Dimensions & Weight

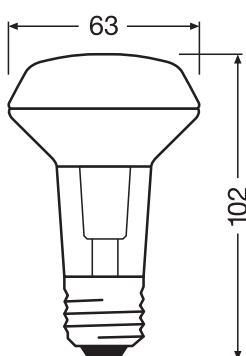

|                  |           |
|------------------|-----------|
| Overall length   | 102.00 mm |
| Diameter         | 63.00 mm  |
| Maximum diameter | 63 mm     |
| Product weight   | 102.00 g  |

### Temperatures & operating conditions

|                                      |              |
|--------------------------------------|--------------|
| Ambient temperature range            | -20...+40 °C |
| Maximum temperature at tc test point | 83 °C        |

### Lifespan

|          |         |
|----------|---------|
| Lifespan | 15000 h |
|----------|---------|

|                                     |        |
|-------------------------------------|--------|
| Number of switching cycles          | 100000 |
| Lumen maintenance at end of serv    | 0.70   |
| Rated lamp survival factor at 6,000 | ≥ 0.90 |

### Additional product data

|                             |  |
|-----------------------------|--|
| Base (standard designation) | E27  |
| Mercury content             | 0.0 mg   |
| Mercury-free                | Yes  |
| Product remark              | All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value |

### Capabilities

|          |    |
|----------|----|
| Dimmable | No |
|----------|----|

### Certificates & Standards

|  |                 |
|--|-----------------|
| Energy efficiency class                      | F <sup>1)</sup> |
| Energy consumption                           | 3.00 kWh/1000h  |
| Type of protection                           | IP20            |
| Standards                                    | CE / EAC        |
| Photobiological safety group acc. to EN62778 | RG1             |

<sup>1)</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

### Country-specific categorizations

|                 |                 |
|-----------------|-----------------|
| Order reference | LEDPR6340 2,6W/ |
|-----------------|-----------------|

### Energy labelling regulation data acc EU 2019/2015

|   |     |
|---|-----|
| Lighting technology used                            | LED |
| Non-directional or directional                      | DLS |
| Mains or non-mains                                  | MLS |
| Light source cap-type (or other electric interface) | E27 |
| Connected light source (CLS)                        | No  |
| Color-tuneable light source                         | No  |
| Envelope  | No  |
| High luminance light source                         | No  |
| Anti-glare shield                                   | No  |

|  |                |
|--|----------------|
| Correlated colour temperature type                   | SINGLE_VALUE   |
| Claim of equivalent power                            | Yes            |
| Length   | 102.00 mm      |
| Height   | 63.00 mm       |
| Width  | 63.00 mm       |
| Chromaticity coordinate x                            | 0.455          |
| Chromaticity coordinate y                            | 0.405          |
| R9 Colour rendering index                            | 1              |
| Beam angle correspondence                            | NARROW_CONE_90 |
| Survival factor                                      | 0,9            |
| Displacement factor                                  | 0.50           |
| LED light source replaces a fluorescent light source | No             |
| EPREL ID   | 522936         |
| Model number   | AC32666        |

## DOWNLOAD DATA

| DOWNLOAD DATA |
|---------------|
|---------------|



Declarations Of Conformity CE

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume               |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075607910 | Folding box<br>1             | 65 mm x 65 mm x 107 mm               | 119.00 g     | 0.45 dm <sup>3</sup> |
| 4058075607927 | Shipping box<br>10           | 357 mm x 147 mm x 125 mm             | 1323.00 g    | 6.56 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

- For further products and actual information concerning LED lamps see [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)
- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

